

Reducing Valve Kit


Part No.

35740-38K

- Valve
- Sleeve
- O-Rings (2)

1 Extra

Chrysler 850RE; ZF8HP50, ZF8HP75

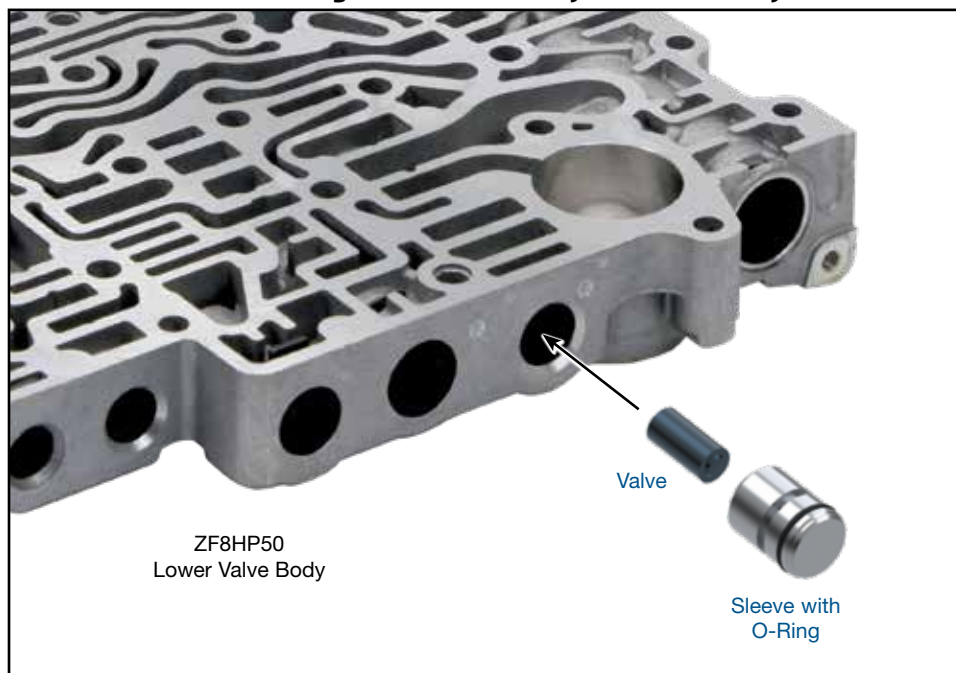

1. Disassembly

- Remove OE retainer and set aside for reuse.
- Remove and discard OE reducing valve/sleeve assembly.

2. Installation & Assembly

- Install Sonnax O-ring into shallow groove of Sonnax sleeve. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size O-ring into the groove.
- Carefully insert Sonnax O-ringed reducing valve/sleeve assembly into the bore and reinstall the OE retainer.

3. Final Testing

Vacuum testing at the port(s) indicated holds the recommended minimum 18 in-Hg.

